

RENO FIVE DEPARTURE

SI-346 (FAA)

RENO/TAHOE INTL (RNO)

RENO, NEVADA

TAKE-OFF MINIMUMS

Rwy 7: NA- Obstacles.

Rwy 16L: Standard with minimum climb of 730' per NM to 10900, or 600-1½ with minimum climb of 352' per NM to 10900.

Rwy 16R: Standard with minimum climb of 460' per NM to 10900, or 300-1 with minimum climb of 395' per NM to 10900.

Rwy 25: Standard with minimum climb of 500' per NM to 9700.

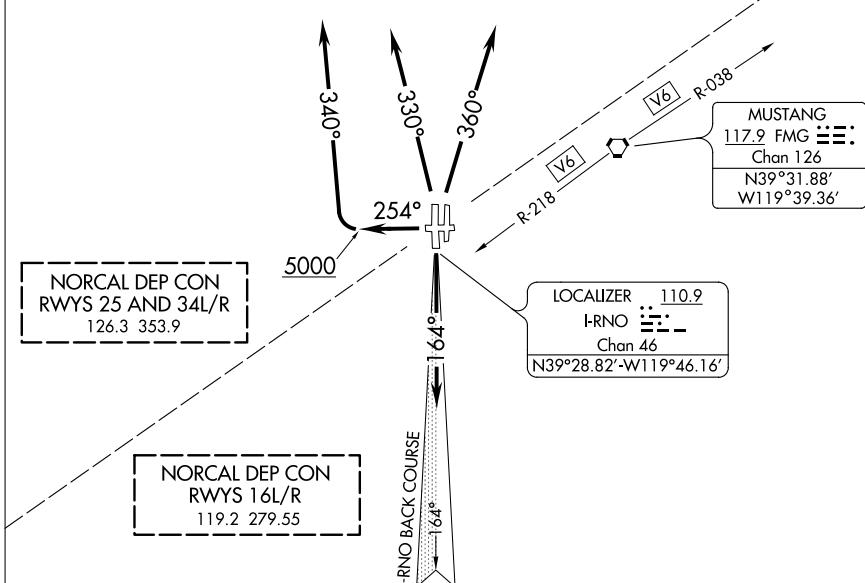
Rwys 34L/R: Standard with minimum climb of 480' per NM to 8700, or 500-1½ with minimum climb of 430' per NM to 8700.

NOTE: RADAR required.

ATIS 135.8 363.0
CLNC DEL
124.9 370.85
GND CON
121.9 348.6
RENO TOWER
118.7 257.8

SW-4, 07 MAR 2013 to 04 APR 2013

SW-4, 07 MAR 2013 to 04 APR 2013

TAKEOFF OBSTACLE NOTES

Rwy 16L: Multiple poles, trees, bushes, terrain and buildings with antennas and cameras beginning 618' from DER, 131' left of centerline, up to 20' AGL/4959' MSL.

Rwy 16R: Multiple trees beginning 2784' from DER, 171' right of centerline, up to 20' AGL/4510' MSL.
Multiple trees and terrain beginning 746' from DER, 380' left of centerline, up to 20' AGL/4723' MSL.Rwy 25: Multiple trees, poles, fences, and vent on building beginning 222' from DER, 201' right of centerline, up to 103' AGL/4608' MSL.
Multiple trees, poles and a sign beginning 500' from DER, 31' left of centerline, up to 20' AGL/4506' MSL.Rwy 34L: Multiple trees and pole beginning 1229' from DER, 180' right of centerline, up to 20' AGL/4498' MSL.
Multiple trees beginning 1193' from DER, 331' left of centerline, up to 20' AGL/4489' MSL.Rwy 34R: Multiple trees and poles beginning 1067' from DER, 172' right of centerline, up to 20' AGL/4497' MSL.
Multiple trees beginning 1230' from DER, 350' left of centerline, up to 20' AGL/4498' MSL.
Building 1.2 NM from DER, 1730' right of centerline, 363' AGL/4780' MSL.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

RENO FIVE DEPARTURE

(RENO5.FMG) 11237

RENO, NEVADA

RENO/TAHOE INTL (RNO)